

Arduino Based Bluetooth Controller

¹PRANGYA PARAMITA PATRA, ²MANISH KUMAR SUTAR, ³SHUBHAM DAS, ⁴SAMRAT JANA, ⁵SARADIYA KISHORE
PARIJA

^{1,2,3,4}, Students, Department of Electronics and Communication Engineering, Gandhi Institute for Technology, Bhubaneswar

⁵Asst. Professor, Department of Electronics and Communication Engineering, Gandhi Institute for Technology, Bhubaneswar

Abstract: - *A remote-controlled vehicle is a mobile machine that is operated using control signals transmitted from an external source, which is not physically connected to the vehicle. In this project, we aim to design a Bluetooth-controlled car using an Arduino microcontroller. This project does not fall under the category of a "robot," as the vehicle lacks sensors for autonomous operation. Instead, it is a machine controlled manually via Bluetooth technology.*

The goal of this project is to create a Bluetooth-controlled car that can be easily operated using any Android-based smart device. The car is equipped with basic mobility features powered by an Arduino microcontroller, which receives commands through Bluetooth. The key advantage of using Bluetooth technology is its versatility, as it allows the remote control to be switched between different devices, such as mobile phones, tablets, and laptops, without being affected by physical barriers like walls or doors.

This Bluetooth-based control system makes it possible to operate the vehicle with ease and flexibility, meeting the project's objective of providing a simple yet effective remote control solution.

Keywords: *Bluetooth Control, Arduino Car, Remote-Controlled Vehicle, Wireless Control*

1. INTRODUCTION

Wireless or Bluetooth-controlled cars are designed to make everyday tasks simpler and more efficient. As technology advances, it becomes increasingly necessary to adopt modern solutions to ease daily activities. Thousands of lives are lost each year due to road accidents. With the advent of remote-controlled technology, the potential to save lives has grown significantly. Bluetooth-controlled cars represent a major leap forward, offering applications in various sectors like mobile surveillance, military operations (where no human intervention is needed), assistive devices (e.g., wheelchairs), and home automation. They promise to overcome significant challenges faced in transportation today. Furthermore, driverless cars are enabling mobility for individuals who cannot drive, creating new opportunities for commuters. In this context, Bluetooth-controlled cars emerge as a gadget of the future, holding immense potential for advancement [1].

2. LITERATURE REVIEW

Bluetooth-controlled cars can be particularly beneficial for individuals with physical disabilities or for those who wish to drive but cannot due to various impairments. The vehicle's wireless operation allows it to be controlled from a distance, ensuring greater safety in hazardous conditions. These vehicles eliminate the need for human intervention in situations where there are risks to life, offering a safer and more accessible alternative. The project revolves around designing a Bluetooth-controlled car, with an Arduino UNO as the central processing unit responsible for the car's operations. The Arduino UNO board functions as the main microcontroller, running the program that controls the vehicle's movement. A motor driver is used to control the wheels, and the program is compiled using the Arduino IDE, then uploaded to the board via a USB cable. The project also incorporates a 4-wheel drive platform, an ultrasonic sensor for obstacle avoidance, and line tracing sensors for automatic navigation. Additionally, an infrared remote controller is included for manual steering.

This project is modular, allowing for future upgrades and the addition of new sensors and functionalities. These enhancements can make the vehicle more versatile and applicable in a wide range of fields, including assistive technologies and automation. [2]

3. LITERATURE REVIEW

Wireless control has become an essential part of modern life. Among the various wireless technologies, Bluetooth stands out as one of the most commonly used for remote control applications. Bluetooth-controlled cars combine the power of Arduino microcontrollers with Bluetooth communication, enabling users to control various devices, including home lighting systems and appliances, through their smartphones.

The rise of automation has brought numerous advantages, including reducing the risk of injury, increasing efficiency, and ensuring reliability. Bluetooth-controlled cars are a prime example of automation in action. Such vehicles are already in use for law enforcement and military applications, where they are deployed to mitigate risks in hazardous situations, such as bomb disposal. These vehicles are remotely controlled, ensuring the safety of personnel while performing high-risk tasks.

Bluetooth-controlled vehicles also find applications in space exploration, where organizations like NASA, ESA, and ROSCOSMOS utilize remote-controlled devices to explore outer space and gather crucial data from the Moon, Mars, and other celestial bodies. In the commercial sector, remote-controlled vehicles are becoming increasingly common, with companies using them for product delivery and internal transportation in large factories.

In this project, an Arduino-based Bluetooth-controlled 4-wheeler is developed. The vehicle is controlled using a custom Android application that communicates with the Bluetooth module installed on the car. The Bluetooth module receives the commands from the app and passes them to the Arduino, which interprets the signals and sends the corresponding commands to the motors, allowing the car to move as instructed. While this project represents a basic prototype, it lays the groundwork for further enhancements. Future upgrades may include adding line-detecting sensors, obstacle-avoidance features, and even cameras for real-time monitoring. The project also holds potential for advanced applications in military, surveillance, and assistive technology fields.

Furthermore, this project demonstrates the feasibility of building low-cost prototypes with readily available components. The programming languages used for the Arduino and the development tools are free, making it an accessible and cost-effective solution. As production scales up, the costs of components can further decrease, making it a viable option for widespread use in various industries. [3-4]

4 METHODOLOGY

- **Chassis (Including Motors and Wheels):** The chassis forms the main body of the car. It consists of a frame with four motors attached to the wheels, which provide the movement for the car. The motors are responsible for moving the car in different directions based on the commands received from the microcontroller.



Fig. 1 Chassis (Including Motors and Wheels)

- **Arduino Uno:** The Arduino Uno is an open-source microcontroller board based on the Microchip ATmega328P microcontroller. It features a variety of digital and analog input/output pins that can interface with other circuits and expansion boards, making it a powerful tool for controlling devices like the Bluetooth-controlled car.



Fig. 2 Arduino Uno

- **L293D Motor Drive H-Shield:** The L293D motor driver is an essential component for controlling the speed and direction of motors. It can simultaneously control two motors and is designed to work at voltages ranging from 5V to 36V. The rotation of the motors is governed by the enabled pins.

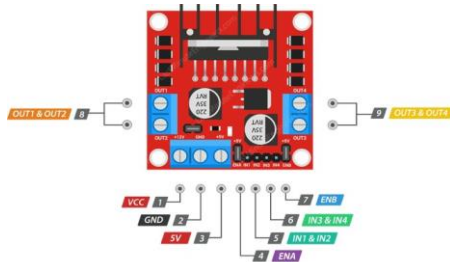


Fig. 3 L293D Motor Drive H-Shield

- **Jumper Wires:** Jumper wires are used for making electrical connections between components on a breadboard or with other circuits. These wires typically have connectors or pins at both ends, allowing them to link various parts of the prototype without the need for soldering.

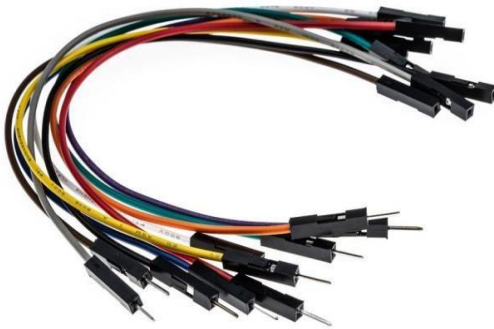


Fig. 4 Jumper Wires

- **Battery:** A 9V battery is used as the power source for the car. The battery powers the Arduino microcontroller and the motors, providing the necessary energy for the car to function.

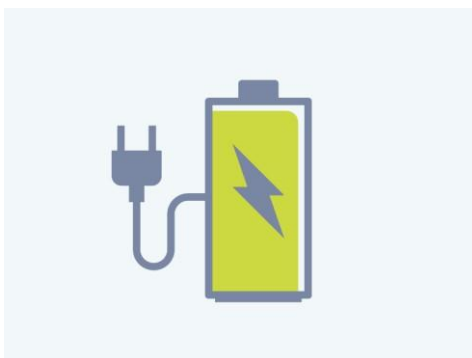


Fig. 5 Battery

- **Switch:** A switch is used to turn on and off the power supply to the vehicle. It acts as the main control for the vehicle's power, allowing users to switch the car on or off easily.



Fig. 6 Switch

- **Bluetooth Module:** The HC-05 Bluetooth module is used for wireless communication. It connects the Arduino to a smartphone or computer via Bluetooth, enabling users to send control signals to the car. The HC-05 module is a slave device, meaning it can only connect to master devices like smartphones or computers.

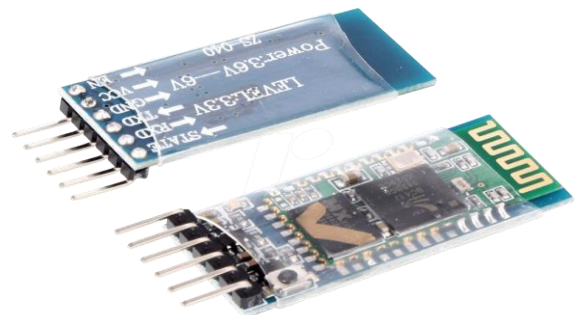


Fig. 7 Bluetooth Module

- **LCD Display:** An I2C LCD display is used to show information about the car's status. It makes it easy to display messages such as "Car is Ready" or "Moving Forward" during the operation of the car. This module simplifies the process of displaying text and graphics with minimal code.

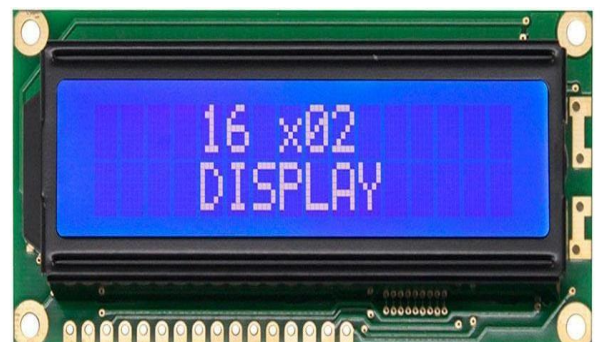


Fig. 8 LCD Display

- **Pin Diagram & Connection:**

The pin diagram outlines how various components are connected to the Arduino board, including the motor driver, Bluetooth module, LCD, and the power connections. Proper wiring ensures that all components function together correctly.

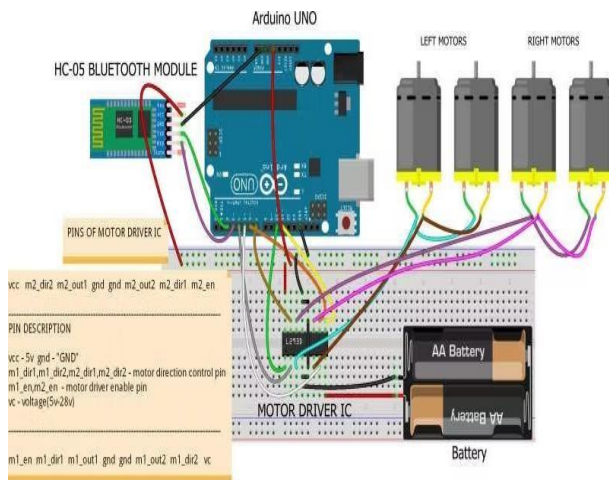


Fig. 9 Pin Diagram & Connection

• Flow Chart of Implementation:

The flowchart outlines the steps involved in the implementation process, from initializing the Bluetooth module and receiving commands to controlling the motors and displaying the status on the LCD.

This methodology provides a detailed guide on the hardware and software setup for creating a Bluetooth-controlled vehicle using Arduino. The project is scalable, and future modifications can include adding sensors, cameras, or advanced autonomous capabilities.

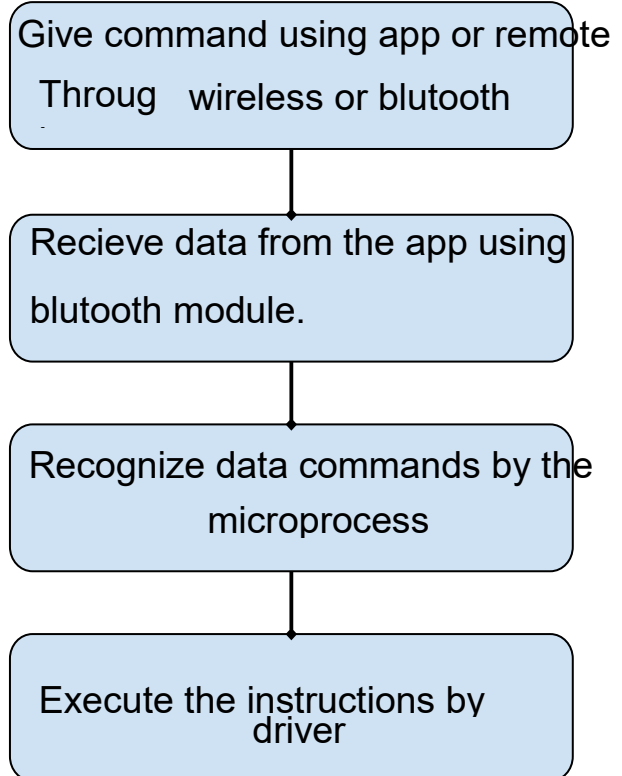


Fig. 10 Flow Chart

4. RESULTS AND DISCUSSION

The prototype of the Bluetooth-controlled car has been successfully developed using four DC motors, driven by an H-bridge motor driver. The car can be remotely controlled via Bluetooth or infrared signals. The vehicle is capable of performing basic movements such as turning left, right, and stopping with high precision based on the user's commands.

Additional functionalities, such as a line tracking mode, can further enhance the robot's capabilities. In this mode, when the car detects an obstacle placed on the line, it will attempt to navigate around the obstacle and continue following the line. This feature could be implemented using an ultrasonic sensor for better navigation and obstacle avoidance.

Another improvement could be the addition of a custom mode, where users can program the car directly through the app. While this functionality has not been implemented in the current version, it could be easily integrated by modifying the code to allow users to upload new commands or scripts from the app.

5 CONCLUSION

This project has demonstrated the basic functionality of a Bluetooth-controlled car that can receive commands via Bluetooth and perform movements such as moving forward, backward, turning left, turning right, and stopping with accuracy. The car operates within a range of

10-20 meters, depending on the strength of the Bluetooth signal, which is sufficient for most practical applications. Currently, a non-rechargeable 9V battery powers the car. Moving forward, rechargeable batteries such as Ni-Cd or Li-ion batteries could be used to increase the operational time and reduce the ongoing cost of replacing batteries. The use of **IoT** in this project plays a significant role in enabling remote control and management of the vehicle. By programming the car using Arduino and integrating Bluetooth or other communication methods, the car can be operated and controlled from different platforms.

REFERENCES

- [1] Sharma, R., & Soni, R. (2020). "Design and implementation of Bluetooth controlled robotic vehicle using Arduino." *International Journal of Advanced Research in Electrical, Electronics, and Instrumentation Engineering*, 9(5), 2101-2107.
- [2] Kaur, G., & Sinha, A. (2019). "Development of IoT based vehicle control system using Bluetooth." *International Journal of Computer Applications*, 178(5), 8-13.
- [3] Mishra, S., & Srivastava, M. (2018). "Bluetooth based robotic vehicle using Arduino and L293D motor driver." *Proceedings of the International Conference on Communication and Electronics Systems (ICCES)*, 163-167.
- [4] Jha, P., & Sharma, R. (2017). "Wireless control of robotic vehicles using Bluetooth technology." *International Journal of Engineering and Technology*, 9(3), 2124-2129.